




## TPTCM60III

### 60mm ticket / receipt printer

- Best quality print quality (200 DPI)
- Paper width: 60mm
- Paper thickness: from 63 to 100  $\mu$ m
- Printing > 140 mm/sec
- Up to 160mm paper roll diameter (with optional mounting bracket kit)
- RS232 + USB interfaces
- Highly reliable cutter: > 1,000,000 cuts
- Sensors: head temperature, paper presence, print head opening, paper end and near paper end

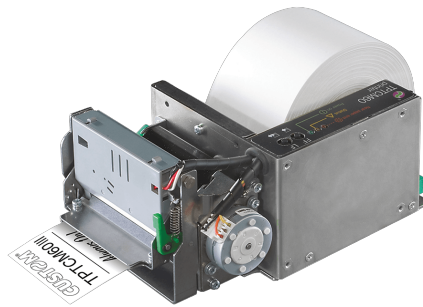


## CHARACTERISTICS

- 1D/ 2D (QR CODE) barcode printing feature
- International fonts on board: any language available
- Strong motorised dispenser available
- Sturdy and reliable: robust and light mechanical parts
- Versatile: **optional** paper roll holder - 5 positions
- Illuminated paper outfeed (LED)
- DIN power supply connector
- Cut&drop version available
- Plastic paper bezel (optional)

## APPLICATIONS

- Self-service kiosks
- Banking machines and cash dispensers
- Vending machines: milk, water, wine, liquid detergents
- Industrial machines
- Queue management systems
- Parking systems
- Quality control

## AVAILABLE VERSIONS

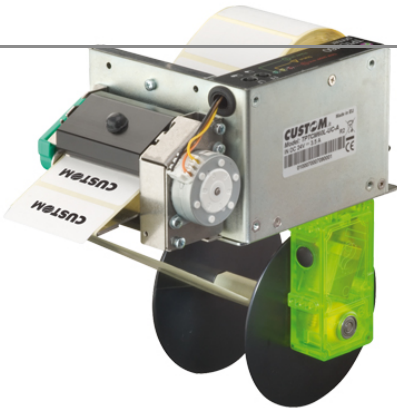


### TPTCM60III L

- Industrial labelling machine for heavy workloads
- Label width: 60mm
- Embedded rewinder for easy and safe label unwrapping
- Adjustable label roll holder with near paper end sensors
- Label roll with max. diameter of up to 80mm
- RS232 + USB interfaces


## TECHNICAL SHEET

|                       |                                                                                                                                                     |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Printing Method       | Thermal with fixed head                                                                                                                             |
| Number of dots        | 8 dots/mm                                                                                                                                           |
| Resolution            | 203 DPI                                                                                                                                             |
| Printing (mm/sec)     | >140 mm/sec                                                                                                                                         |
| Character set         | International (default), Chinese, Korean                                                                                                            |
| Supported Barcode     | UPCA, UPCE, EAN13, EAN8, CODE39, ITF, CODABAR, CODE93, CODE128, CODE32, PDF417, DATAMATRIX, AZTEC, QRCODE                                           |
| Printing Format       | Height and width from 1 to 8, bold, negative, underlined, script                                                                                    |
| Printing Direction    | Straight, 90°, 180°, 270°                                                                                                                           |
| Paper width           | 60 mm                                                                                                                                               |
| Paper weight          | from 60 to 90 g/m <sup>2</sup>                                                                                                                      |
| Paper thickness       | from 63 to 100 <del>um</del> μm                                                                                                                     |
| Roll Dimension        | max 160 mm (90 mm without roll holder stirrup)                                                                                                      |
| Emulation             | CUSTOM/POS, TPTCMII                                                                                                                                 |
| Interfaces            | RS232 + USB                                                                                                                                         |
| Data Buffer           | 16 KB                                                                                                                                               |
| Flash Memory          | 1MB internal, 4MB external                                                                                                                          |
| RAM Memory            | 128Kb internal, 8MB external                                                                                                                        |
| Drivers               | Windows® (32/64 bit) – only on request WHQL and silent installation;<br>Linux (32/64 bit);<br>Virtual COM (Linux or Windows 32/64 bit);<br>Android™ |
| Software Tools        | PrinterSet, CustomPowerTool, Status Monitor, Custom Windows API                                                                                     |
| Power supply          | 24 Vdc ± 10%                                                                                                                                        |
| Medium consumption    | 1.2A (12.5% dots turned on)                                                                                                                         |
| MTBF                  | 122,000 hours (electronic board)                                                                                                                    |
| Head Life             | 50 Km / 100M pulses                                                                                                                                 |
| MCBF                  | 1,000,000 cuts                                                                                                                                      |
| Operating temperature | 0°C + 50°C                                                                                                                                          |
| Dimensions            | 194.5(L)x80.3(H)x112.4(W) mm with short paper mouth 265.5(L)x80.3(H)x115(W) mm with dispenser                                                       |
| Weight                | 1.2 Kg (without ejector) 1.5 Kg (with ejector)                                                                                                      |

## MODELS

**915KU010300300**

PRINTER TPTCM60III USB RS232  
EJECTOR

**915KU010400300**

PRINTER TPTCM60IIIL USB RS232  
NOTCH

---

Via Berettine, 2 - 43010 Fontevivo PR - VAT: IT02498250345 - TEL: +39 0521 680111 - FAX: +39 0521 610701 - UNIQUE CODE: 8RQN7AZ

The technical data on this website are not binding and may be changed without advanced notice.

Last update: 17 May 2024